


Construction Specifications, Sidewalks

- Sidewalk, Concrete Curb & Planter Model
- Sidewalk, Concrete Curb & Planter, Commercial Grade Model
- Sidewalk, Concrete Curb - No Planter Model
- Sidewalk, Stone Curb & Planter Model

SIDEWALK & CONCRETE CURB DETAIL WITH GRASS PLANTER

NO SCALE

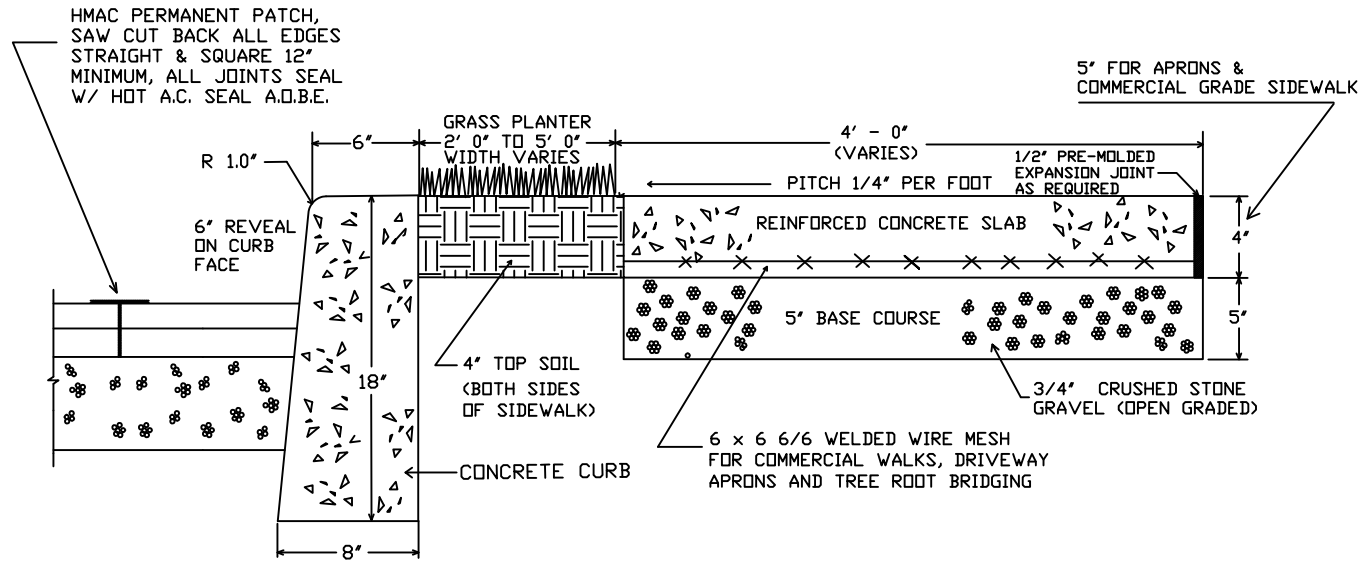

ENGINEER'S NOTES:

- * SUBMIT ALL PERMITS AND FEES AS PER TOWN LAW.
- * CONTRACTOR SHALL CALL 'DIG SAFELY, NEW YORK' AS PER NYS LAW. 1-800-962-7962.
- * ALL CONCRETE SHALL BE CLASS A - 1:2:4 MIX DESIGN, 4000 psi @ 28 DAY TEST.
- * PLACE 1/2" PRE-MOLDED EXPANSION JOINT EVERY 20 FEET. APPLY BROOM FINISH AND TROWEL ALL EDGES.
- * ALL CONCRETE SHALL BE TREATED WITH A CURING AGENT APPROVED BY THE TOWN.
- * ALL SUBGRADE SHALL BE MECHANICALLY COMPACTED @ 95% STD. PROCTOR TEST.
- * ALL SIDEWALK INTENDED FOR VEHICLE PASSAGE SHALL BE 5" THICK W/ 6"x6" 6/6 WELDED WIRE MESH REINFORCEMENT.
- * ARRANGE FOR INSPECTION WITH HIGHWAY DEPARTMENT PRIOR TO PLACEMENT OF CONCRETE.

TELEPHONE (914) 381-7825



TOWN OF MAMARONECK ENGINEERING DEPARTMENT
SIDEWALK & CURB SPECIFICATIONS

PROPERTY ADDRESS:


OWNER \ CONTRACTOR:

PERMIT #:

DRAWN BY: DG CHECKED BY: MG FILE: SEWER.DWG

COMMERCIAL SIDEWALK & CONCRETE CURB DETAIL

NO SCALE

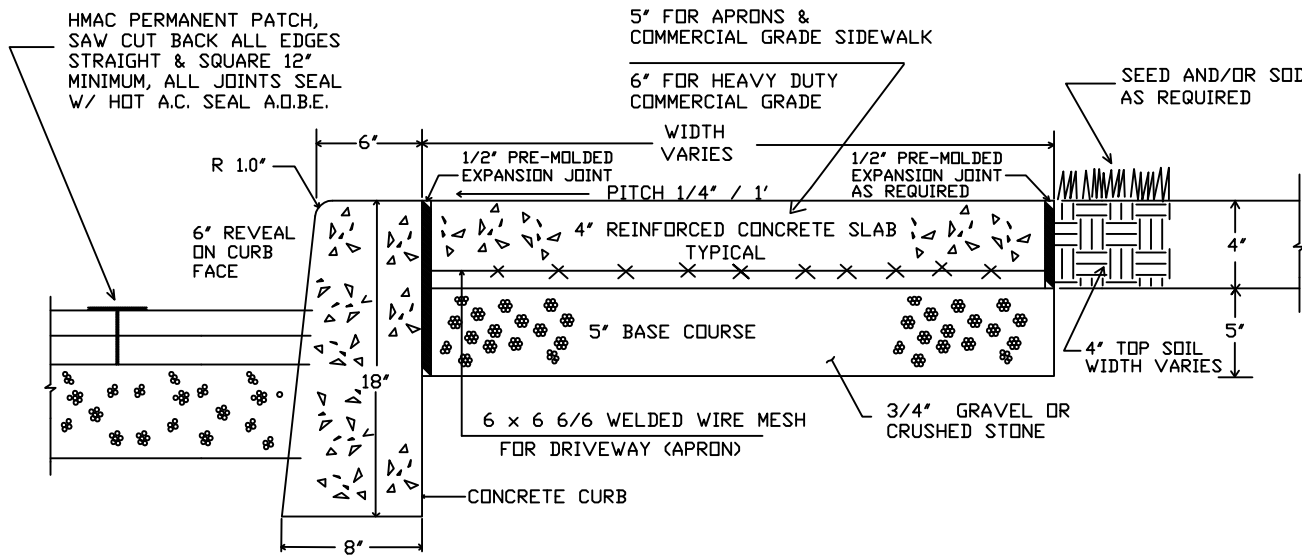

ENGINEER'S NOTES:

- * SUBMIT ALL PERMITS AND FEES AS PER TOWN LAW.
- * CONTRACTOR SHALL CALL 'DIG SAFELY, NEW YORK' AS PER NYS LAW. 1-800-962-7962.
- * ALL CONCRETE SHALL BE CLASS A - 1:2:4 MIX DESIGN, 4000 psi @ 28 DAY TEST.
- * PLACE 1/2" PRE-MOLDED EXPANSION JOINT EVERY 20 FEET. APPLY BROOM FINISH AND TROWEL ALL EDGES.
- * ALL CONCRETE SHALL BE TREATED WITH A CURING AGENT APPROVED BY THE TOWN.
- * ALL SUBGRADE SHALL BE MECHANICALLY COMPACTED @ 95% STD. PROCTOR TEST.
- * ALL SIDEWALK INTENDED FOR VEHICLE PASSAGE SHALL BE 5" THICK w/ 6"x6" 6/6 WELDED WIRE MESH REINFORCEMENT.
- * ARRANGE FOR INSPECTION WITH HIGHWAY DEPARTMENT PRIOR TO PLACEMENT OF CONCRETE.

TELEPHONE (914) 381-7825



TOWN OF MAMARONECK ENGINEERING DEPARTMENT
SIDEWALK & CURB SPECIFICATIONS


PROPERTY ADDRESS:

OWNER \ CONTRACTOR:

PERMIT #:

SIDEWALK & CONCRETE CURB DETAIL

NO SCALE

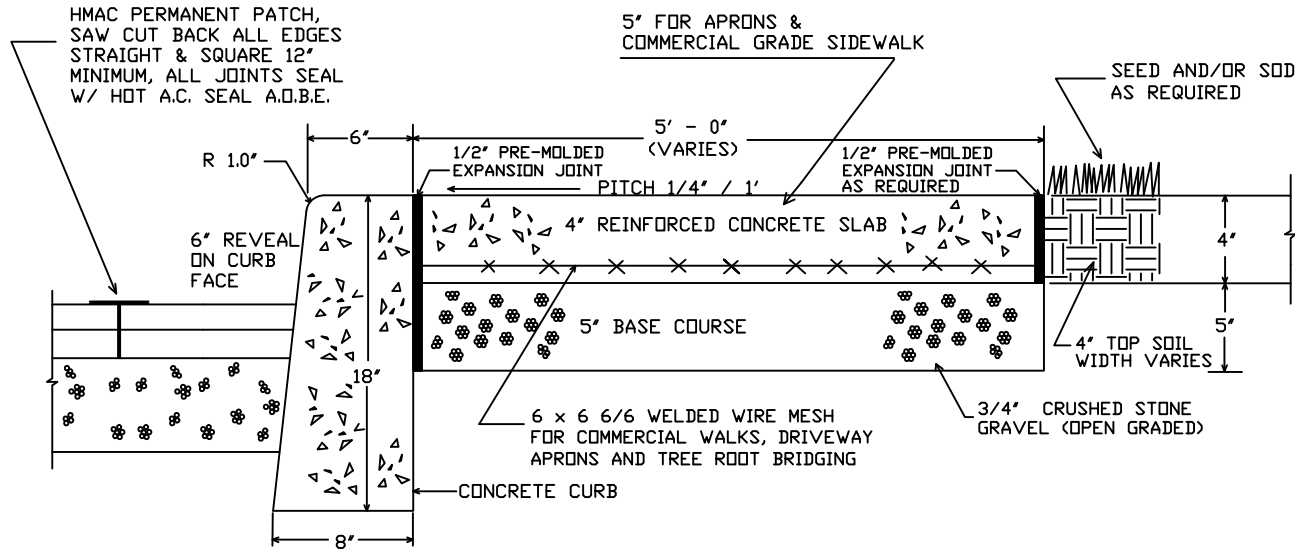

ENGINEER'S NOTES:

- * SUBMIT ALL PERMITS AND FEES AS PER TOWN LAW.
 - * CONTRACTOR SHALL CALL "DIG SAFELY, NEW YORK" AS PER NYS LAW. 1-800-962-7962.
 - * ALL CONCRETE SHALL BE CLASS A - 1:2:4 MIX DESIGN, 4000 psi @ 28 DAY TEST.
 - * PLACE 1/2" PRE-MOLDED EXPANSION JOINT EVERY 20 FEET. APPLY BROOM FINISH AND TROWEL ALL EDGES.
 - * ALL CONCRETE SHALL BE TREATED WITH A CURING AGENT APPROVED BY THE TOWN.
 - * ALL SUBGRADE SHALL BE MECHANICALLY COMPACTED @ 95% STD. PROCTOR TEST.
 - * ALL SIDEWALK INTENDED FOR VEHICLE PASSAGE SHALL BE 5' THICK w/ 6"x6" 6/6 WELDED WIRE MESH REINFORCEMENT.
 - * ARRANGE FOR INSPECTION WITH HIGHWAY DEPARTMENT PRIOR TO PLACEMENT OF CONCRETE.
- TELEPHONE (914) 381-7825




TOWN OF MAMARONECK ENGINEERING DEPARTMENT
SIDEWALK & CURB SPECIFICATIONS

PROPERTY ADDRESS:

OWNER \ CONTRACTOR:

PERMIT #:

SIDEWALK & STONE CURB DETAIL WITH GRASS PLANTER NO SCALE

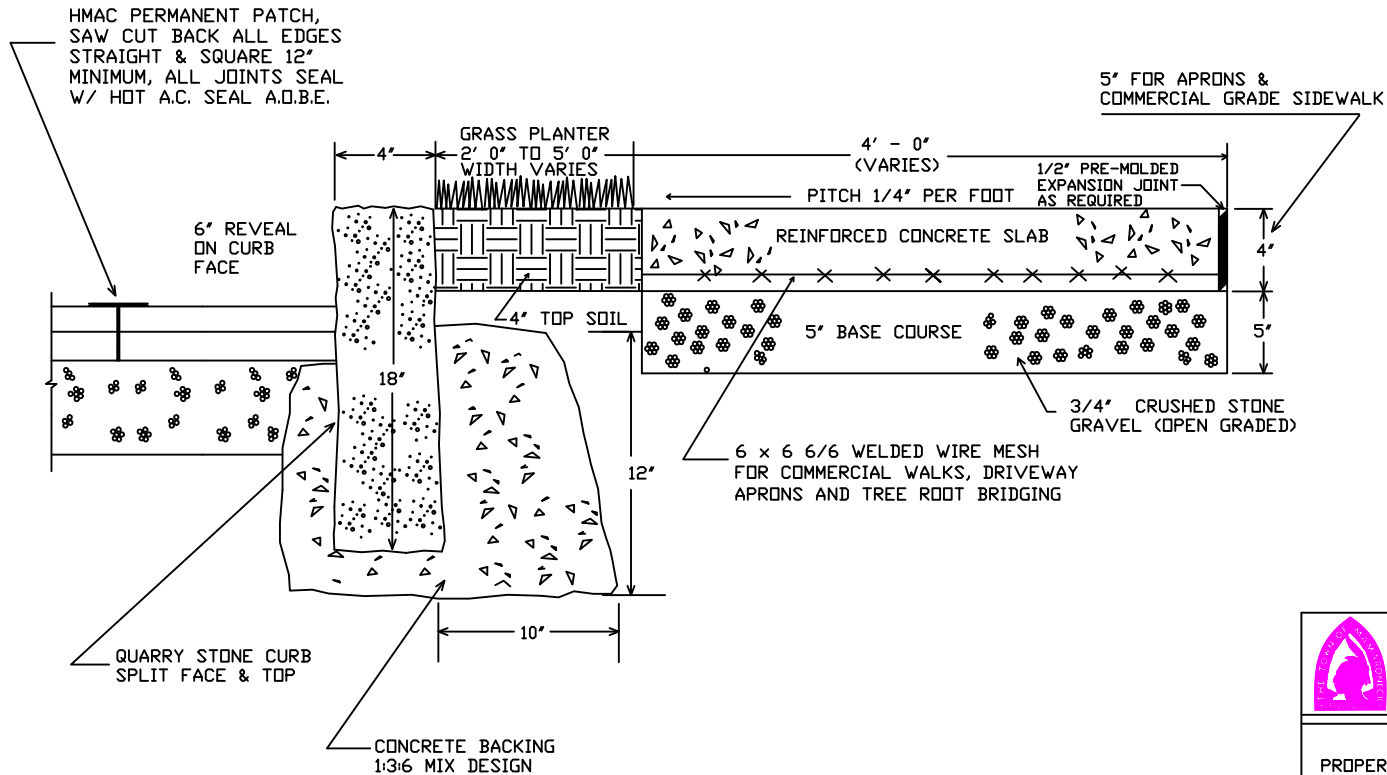

ENGINEER'S NOTES:

- * SUBMIT ALL PERMITS AND FEES AS PER TOWN LAW.
- * CONTRACTOR SHALL CALL "DIG SAFELY, NEW YORK" AS PER NYS LAW. 1-800-962-7962.
- * ALL CONCRETE SHALL BE CLASS A - 1:2:4 MIX DESIGN, 4000 psi @ 28 DAY TEST.
- * PLACE 1/2" PRE-MOLDED EXPANSION JOINT EVERY 20 FEET. APPLY BROOM FINISH AND TROWEL ALL EDGES.
- * ALL CONCRETE SHALL BE TREATED WITH A CURING AGENT APPROVED BY THE TOWN.
- * ALL SUBGRADE SHALL BE MECHANICALLY COMPACTED @ 95% STD. PROCTOR TEST.
- * ALL SIDEWALK INTENDED FOR VEHICLE PASSAGE SHALL BE 5" THICK w/ 6"x6" 6/6 WELDED WIRE MESH REINFORCEMENT.
- * ARRANGE FOR INSPECTION WITH HIGHWAY DEPARTMENT PRIOR TO PLACEMENT OF CONCRETE.

TELEPHONE (914) 381-7825



TOWN OF MAMARONECK ENGINEERING DEPARTMENT
SIDEWALK & CURB SPECIFICATIONS

PROPERTY ADDRESS:

OWNER \ CONTRACTOR:

PERMIT #: